Received: Added at production | Revised: Added at production | Accepted: Added at production

DOI: xxx/xxxx

ARTICLE TYPE

Inverse Design of Planar Clamped-Free Elastic Rods from Noisy Data

Dezhong Tong[†1] | **Zhuonan Hao**[†2] | **Jiahao Li**[3] | **Weicheng Huang**[4]

[1]Department of Material Science and Engineering, University of Michigan, Ann Arbor, Michigan, 48105, USA

[2]Department of Mechanical and Aerospace Engineering, University of California, Los Angeles, California, 90095, USA

[3]Department of Modern Mechanics, University of Science and Technology of China, Hefei 230027, China

[4]School of Engineering, Newcastle University, Stephenson Building, Newcastle upon Tyne, NE1 7RU, UK

Correspondence
Corresponding author Weicheng Huang.
Email: weicheng.huang@ncl.ac.uk
[†] Equal contribution

Abstract

Slender structures, such as rods, often exhibit large deformations even under moderate external forces (e.g., gravity). This characteristic results in a rich variety of morphological changes, making them appealing for engineering design and applications, such as soft robots, submarine cables, decorative knots, and more. Prior studies have demonstrated that the natural shape of a rod significantly influences its deformed geometry. Consequently, the natural shape of the rod should be considered when manufacturing and designing rod-like structures. Here, we focus on an inverse problem: can we determine the natural shape of a suspended 2D planar rod so that it deforms into a desired target shape under the specified loading? We begin by formulating a theoretical framework based on the statics of planar rod equilibrium that can compute the natural shape of a planar rod given its target shape. Furthermore, we analyze the impact of uncertainties (e.g., noise in the data) on the accuracy of the theoretical framework. The results reveal the shortcomings of the theoretical framework in handling uncertainties in the inverse problem, a fact often overlooked in previous works. To mitigate the influence of the uncertainties, we combine the statics of the planar rod with the adjoint method for parameter sensitivity analysis, constructing a learning framework that can efficiently explore the natural shape of the designed rod with enhanced robustness. This framework is validated numerically for its accuracy and robustness, offering valuable insights into the inverse design of soft structures for various applications, including soft robotics and animation of morphing structures.

KEYWORDS
inverse design, elastic rods, machine learning, sensitivity analysis, adjoint method

1 | INTRODUCTION

Rods, one-dimensional structures characterized by their long and thin geometry, are ubiquitous in the real world. These structures encompass a wide range of physical, biological, and manufactured phenomena, spanning from macroscopic examples such as hairs[1], tendrils[2], and cables[3] to microscopic ones like DNA molecules[4] and carbon nanotubes[5]. Most rod-like structures are not naturally straight but feature an intricate, curved natural shape, leading to their structural richness, which benefits many engineering applications, including knots[6,7,8], soft robots[9,10], and surgery threads[11,12]. Most prior works have explored the deformations and mechanics of these processes in a forward manner. However, designing the geometry and material parameters of deformable structures, given their deformed configurations and constraints, is sometimes more important for the design and fabrication of rod or beam-like engineering applications. Examples include designing deformations in soft robots for tasks such as navigation[13] or grasping[14], utilizing 4D printing to fabricate electronic devices[15], and creating customized decorations and toys[16].

The inverse design of rod-like structures stems from various theories of elasticity, developed to describe the equilibrium and deformations of rods under finite displacements. In the 19th century, Kirchhoff and Clebsch proposed elastic theory for inextensible and unshearable rods[17], which was later expanded by the Cosserat brothers to include extensible and shearable elastic rods[18]. Numerous research efforts have since focused on developing analytical and numerical approaches to solving the Kirchhoff rod equations for diverse applications, such as studying DNA molecules[19,20] and plant growth[21,2], as well as robotics

This is the author manuscript accepted for publication and has undergone full peer review but has not been through the copyediting, typesetting, pagination and proofreading process, which may lead to differences between this version and the Version of Record. Please cite this article as doi: 10.1002/nme.70018.

This article is protected by copyright. All rights reserved.

Author Manuscript

applications involving deformable structures like wire management[3,22] and sheet folding[23]. All of those works emphasize the significant influence of natural curvature on the deformed configurations of rods and analyze the deformation of rod-like structures in a forward manner. Those works on the forward process underpin the inverse design approaches discussed in this article.

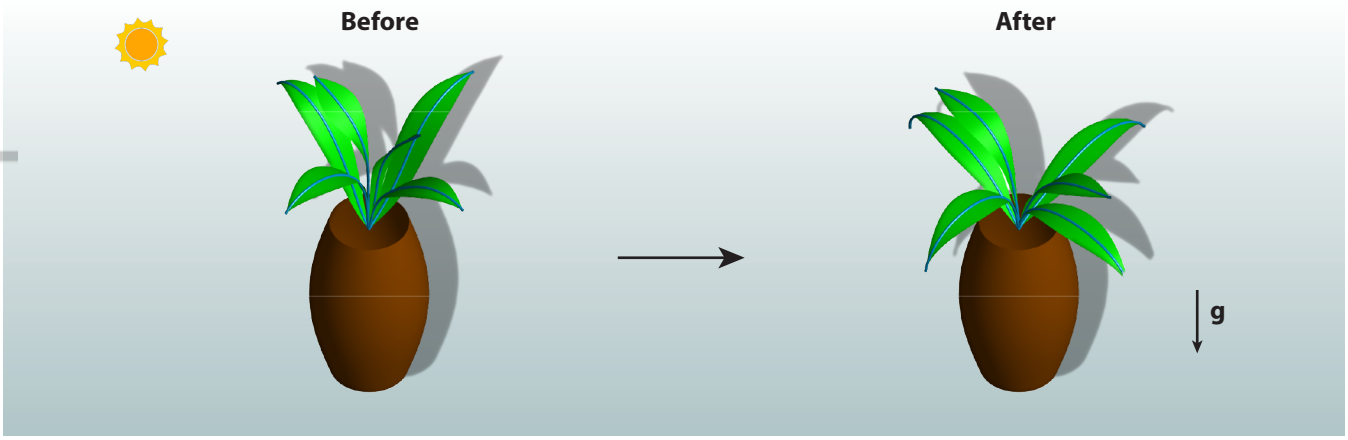


FIGURE 1 Inverse design of an artificial orchid: The left image depicts its natural, pre-deformed shape, while the right shows its final configuration after deforming under gravity.

The inverse problem encompasses various challenges in mechanics, such as identifying external stimuli acting on a body from its deformed configuration or determining the natural shape or material properties of a rod-like structure from its deformed equilibrium and constraints. The focus here is on inverse design, where the material parameters are known and the objective is to discover the natural shape of the rod[24,25], rather than inverse measurements, which aims to identify material properties like bending stiffness[26,27,28] and fibril orientation angle[29]. A representative example is shown in Fig. 1: given a desired target shape, such as an artificial orchid, the challenge lies in determining the initial, pre-deformed configuration that will naturally transform into the desired shape upon deformation. To tackle inverse design problems, various analytical and numerical approaches have been developed by different communities, including applied mathematics, mechanics, and computer graphics[30]. Those approaches can be classified into two main streams. The first stream formulates the inverse problem as elastica problems based on different elastic theories to generate general solutions. Examples include the inverse design for manipulating flexural waves on thin elastic planes using the Kirchhoff-Love equations[31], the inverse design of morphing structures with tapered elastica[32], and the inverse exploration of a rod's natural configuration using the Kirchhoff rod models[24]. The second stream involves numerical modeling approaches such as mass-spring systems and finite element methods (FEM), often assisted by nonlinear optimization algorithms to handle inverse problems in more general, nonlinear systems. For instance, Chen et al.[16] combined the asymptotic numerical method with FEM to tackle the inverse elastic shape design during 3D printing. Topology optimization methods are used to compute the inverse design of the underwater metasurfaces[33], insulators[34], nano structures[35], and mechanical springs[36]. A relevant work[25] utilized a bottom-up optimization method to explore the inverse solution of a clamped-free rod expressed by a mass-spring model.

However, few prior works consider the influence of uncertainties during the inverse design process. Noise is always present when measuring and modeling deformed elastic shapes, significantly affecting the accuracy of inverse design approaches. Addressing these modeling and measurement uncertainties often necessitates a cumbersome process of data processing and model modification[30]. Consequently, most of the above-stated works assume clean experimental data or just stall in the simulations, neglecting the impact of noise on their outcomes.

As data science advances, data-driven approaches show great potential in tackling the inverse design of engineering problems. For example, physics-informed neural networks (PINNs)[37] and neural ordinary differential equations (neural ODEs)[38] have demonstrated significant promise in encoding the physics of a system within a neural network. Machine learning communities introduce physical laws as constraints to guide the training of models to meet specific design requirements. These data-driven approaches have become popular in inverse design problems due to their adjustable regularization and better robustness to

Author Manuscript

uncertainties compared to traditional inverse design approaches[39]. For instance, Lu et al.[40] successfully implemented PINNs to solve a series of inverse problems in solid and fluid mechanics. However, considering the gray-box properties of these physics-informed neural networks, the accuracy of solutions remains a bottleneck for data-driven inverse design approaches.

In this study, we leverage the theoretical foundation of traditional inverse design approaches and the data-driven framework from the machine learning community to propose an innovative solution for exploring the inverse design of elastic structures. Specifically, we focus on the inverse design problem of a planar rod: given the material properties and the targeted shape of the rod under external loading, our objective is to determine the natural shape of the rod. We represent the natural shape of the rod using a surrogate model and combine this with elastic theory to formulate the inverse design solutions. Our approach aims to achieve not only sufficient accuracy but also enhanced robustness against uncertainties in the system. Moreover, we release all our code for the proposed scheme as open-source software.‡

The following article is structured as follows. Sec. 2 discusses the problem that needs to be solved in detail. Sec. 3 provides the theoretical foundation, including the equilibrium of planar rods and the theoretical solution of the inverse problem. Sec. 4 discusses the harmfulness of uncertainties in the modeling and measurements for the theoretical solution and details our proposed method for tackling the inverse design problem with uncertainties. Sec. 5 showcases experimental results and relevant applications. Finally, Sec. 6 concludes the paper and shows potential future work.

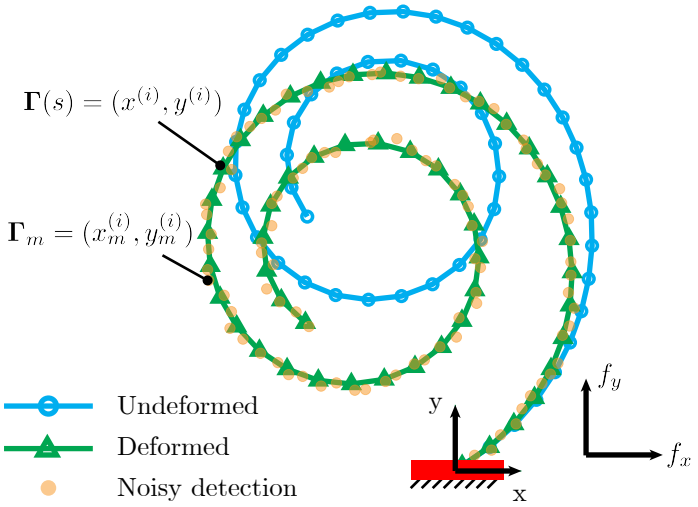


FIGURE 2 Diagram illustrating the deformation process of an elastic rod with a clamped-free configuration under the influence of external loading f_x and f_y. The detection and segmentation of the structure are performed using a finite number of pixel points, as yellow dotted points, with white noise present in the measurement process.

2 | PROBLEM DESCRIPTION

This study focuses on the inverse design problem of a two-dimensional clamped-free elastic rod subjected to external loading f_x and f_y (as shown in Fig. 2). Specifically, the goal is to reconstruct the undeformed, natural shape of the rod from its measured deformed configuration $\mathbf{\Gamma}_m$, known material properties, and specified external loading. Notably, the detection of the deformed configuration is typically performed using digital sensors, such as cameras, which introduce quantization noise during the measurement process—a factor often ignored in prior works. This noise complicates the inverse design process of soft rods.

The primary objective of this paper is to propose a robust and efficient scheme to extract the natural shape of the elastic rod accurately. The proposed method aims to ensure that the rod's reconstructed deformed configuration $\mathbf{\Gamma}$ under the specific external loading closely matches the noisy measured data $\mathbf{\Gamma}_m$. The robust and accurate inverse design scheme is critical for applications that rely on precise deformation modeling and structural analysis.

‡ See https://github.com/DezhongT/Inverse_Design_2D_Rods.

Author Manuscript

3 | BACKGROUND: EQUILIBRIUM OF A 2D PLANAR ROD

Before delving into the inverse design problem, let us straighten out the fundamental principles governing the intrinsic statics of a planar rod subject to external loading.

In this work, we focus on a two-dimensional scenario involving an inextensible and unsharable rod of length S. The rod is composed of a homogeneous, linearly elastic material. The primary source of nonlinearity in the system arises from geometric nonlinear deformations due to the slenderness of the rod. This rod is depicted by a center line $\mathbf{\Gamma} \in \mathbb{R}^2$, along with a rotation angle $\theta \in \mathbb{R}$, both parameterized by arc length $s \in [0, S]$. To simplify the interpretation of the rod's geometry, we define a two-dimensional Cartesian coordinate and designate the end located at $s = 0$ as the origin and the negative direction of gravity as the $\hat{\mathbf{y}}$-axis. Hereafter, all vectors with $\hat{(\cdot)}$ are unit vectors. At given location s, the vector $\mathbf{\Gamma}(s)$ denotes the 2D position (x, y) of the center line, while the first derivative of rotation angle $\theta(s)$ encodes the bending curvature attached to the rod's cross-section. Note that we simplify notations of variables that are functions of s, such as $\mathbf{\Gamma}(\boldsymbol{s})$, to $\mathbf{\Gamma}$ throughout this manuscript's equations. Given the rod is assumed to be inextensible and unshearable, the following equation holds true:

$$\forall s \in [0, S] \quad \mathbf{\Gamma}' = [\cos\theta, \sin\theta], \tag{1}$$

where $()'$ stands for the first derivative with respect to s, with higher-order derivatives represented accordingly, such as $()''$ is the second order derivative and $()'''$ is the third order derivative hereafter. We further assume that the rod is fixed at $s = 0$, indicating this end is clamped. Meanwhile, the other end at $s = S$ is free.

3.1 | Forward mechanics model

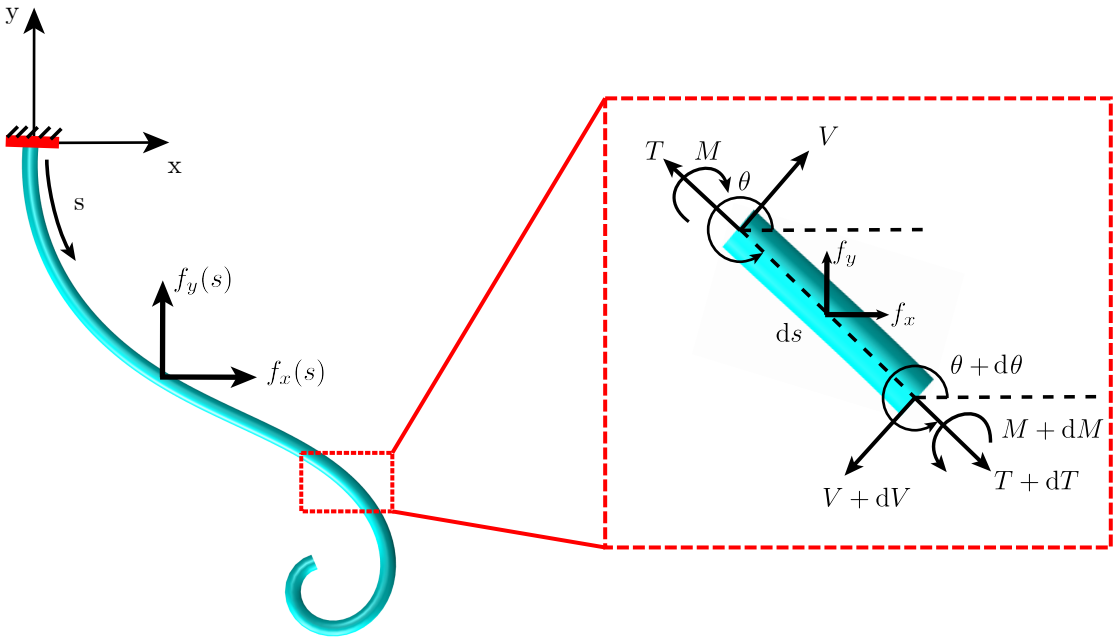


FIGURE 3 The schematic illustrates a planar rod subjected to specified external forces and constraints. The inset provides a detailed free-body diagram of an arbitrary finite element, highlighting the internal forces and moments acting within the structure.

To establish the equilibrium equations of the planar rod, we start with an element ds of the rod. The element and the acting forces are shown in Fig. 3. A tension force $T(s)$ is acting in the direction of the tangent at position s, and the shear force, defined as the force perpendicular to a tension force, is denoted as $V(s)$. In the Cartesian coordinate, $\theta(s)$ is defined by the angle between the tangent and the horizontal axis $\hat{\mathbf{e}}_x$. In this manuscript, we assume the rod is only subjected to the known external load, such

Author Manuscript

as gravity, which can be expressed by $f_x\hat{\mathbf{e}}_x + f_y\hat{\mathbf{e}}_y$. Note that density ρ and cross-sectional A area are treated as constants during the analysis. For the element in equilibrium, the sum of forces must be zero, which can derive the following equations:

$$\begin{aligned} \frac{\mathrm{d}}{\mathrm{d}s}\left(T\cos\theta + V\sin\theta\right) &= -f_x \\ \frac{\mathrm{d}}{\mathrm{d}s}\left(T\sin\theta - V\cos\theta\right) &= -f_y \end{aligned} \tag{2}$$

Meanwhile, the sum of the moments must be zero as well, which leads to:

$$V = \frac{\mathrm{d}M}{\mathrm{d}s} \tag{3}$$

Let E be the Young modulus of the rod, and I be the second moment of area of the rod's cross-section. Static equations are complemented by a constitutive law that characterizes the rod's elastic bending behavior:

$$\forall s \in [0, S] \quad M = EI(\kappa - \kappa_0) = EI(\theta' - \kappa_0), \tag{4}$$

where EI is the bending stiffness of the planar rod, $\kappa(s) = \theta'(s) \in R$ is the curvature of the planar rod, and $\kappa_0(s) \in R$ encompasses the natural curvature of the rod, namely, the shape of the rod would assume in the absence of external forces, which may not be straight. Given modeling the homogeneous material, the stiffness EI is considered constant. Conversely, the natural curvature $\kappa_0(s)$ may vary spatially to encapsulate a diverse range of natural shapes. Next, combining Eqs. 3 and 4, we obtain:

$$V = EI(\theta'' - \kappa_0'), \tag{5}$$

and we introduce new variables:

$$\begin{aligned} \bar{M} &= \frac{M}{\rho A g} \\ \bar{V} &= \frac{V}{\rho A g} \\ \bar{T} &= \frac{T}{\rho A g} \\ \bar{f_x} &= \frac{f_x}{\rho A g} \\ \bar{f_y} &= \frac{f_y}{\rho A g} \end{aligned} \tag{6}$$

where ρ is the volumetric mass density, A is the cross-sectional area, and g is the gravitational acceleration. Here, gravity is used to scale the external loading.

By substituting Eqs. 5 and 6 to Eq. 2, we can obtain:

$$\begin{aligned} \frac{\mathrm{d}}{\mathrm{d}s}\left(\bar{T}\cos\theta + \frac{1}{\eta}(\theta'' - \kappa_0')\sin\theta\right) &= -\bar{f_x} \\ \frac{\mathrm{d}}{\mathrm{d}s}\left(\bar{T}\sin\theta - \frac{1}{\eta}(\theta'' - \kappa_0')\cos\theta\right) &= -\bar{f_y}, \end{aligned} \tag{7}$$

where $\eta = \rho Ag/EI$ characterizes the bending deformations under the external load (gravity). Since a system of first-order differential equations (ODE) can be created from the higher-order ODEs, the system of the first ODEs can be constructed by combing Eqs. 1, 5, 6, and 7:

$$\begin{aligned} \mathbf{q} &= [\theta, \bar{M}, \bar{V}, \bar{T}, x, y]^T \\ \mathcal{R}(\mathbf{q}) &= \frac{\mathrm{d}\mathbf{q}}{\mathrm{d}s} - f(\mathbf{q}) = 0 \\ f(\mathbf{q}, \kappa_0) &= \begin{bmatrix} \eta q_2 + \kappa_0 \\ q_3 \\ -\bar{f_x}\sin q_1 + \bar{f_y}\cos q_1 + \eta q_4(q_2 + \frac{1}{\eta}\kappa_0) \\ -\bar{f_x}\cos q_1 - \bar{f_y}\sin q_1 - \eta q_3(q_2 + \frac{1}{\eta}\kappa_0) \\ \cos q_1 \\ \sin q_1 \end{bmatrix}, \end{aligned} \tag{8}$$

Author Manuscript

where q_i means the i–th element of $\mathbf{q}(s)$. Note that all quantities, including material properties η, external loading $\bar{f}_x$ and $\bar{f}_y$, as well as natural curvature κ_0, are known when solving the forward pass of the rod's statics.

Moving forward, we list the boundary conditions for the ODEs. First, the clamped boundary at location $s = 0$ is:

$$\text{Clamped: } \begin{cases} \boldsymbol{\Gamma}(s=0) = \boldsymbol{\Gamma}_0, & \text{Enforced clamped position} \\ \theta(s=0) = \theta_0, & \text{Enforced clamped rotation} \end{cases} \tag{9}$$

where $\boldsymbol{\Gamma}_0$ and θ_0 are the given values, and $\boldsymbol{\Gamma}_0$ is defined as the origin of the coordinate system. Second, the free boundary at location $s = S$ is:

$$\text{Free: } \begin{cases} \bar{M}(s=S) = 0, & \text{No external torque at the free end} \\ \bar{T}(s=S) = \bar{V}(s=S) = 0, & \text{No external force at the free end} \end{cases} \tag{10}$$

Combining the rod's governing equation stated in Eq. 8 and boundary conditions in Eqs. 9 and 10, we can get the equilibrium configuration of a planar rod in arbitrary natural shape, which is depicted by $\kappa_0(s)$.

3.2 | Inverse design formulation

As our interest here is the inverse design for the 2D planar rod, and, from the input target curve $\boldsymbol{\Gamma}(s)$, we aim at finding its natural curvature $\kappa_0(s)$ so that $\boldsymbol{\Gamma}(s)$ coincides with the center line of the planar rod at equilibrium under external loading. Starting from the rod's governing equation stated in Eq. 8, we can outline the following equation:

$$\bar{T} = \frac{\theta''' - \kappa_0'' - \eta\bar{f}_y\cos\theta + \eta\bar{f}_x\sin\theta}{\eta\theta'}, \tag{11}$$

We can calculate $\bar{T}'(s)$ based on Eq. 11:

$$\bar{T}' = \frac{-\theta'\kappa_0''' + \theta''\kappa_0'' + \theta''''\theta' - \theta'''\theta'' + \eta\bar{\theta}'^2(\bar{f}_x\cos\theta + \bar{f}_y\sin\theta) + \eta\theta''(\bar{f}_y\cos\theta - \bar{f}_x\sin\theta) + \eta\theta'(\bar{f}_x'\sin\theta - \bar{f}_y'\cos\theta)}{\eta\theta'} = 0. \tag{12}$$

Then, substituting Eq. 12 to Eq. 8, we can obtain the following equation:

$$\theta'\kappa_0''' - \theta''\kappa_0'' + \theta'^3\kappa_0' - \theta''''\theta' + \theta'''\theta'' - \theta''(\eta\bar{f}_y\cos\theta - \eta\bar{f}_x\sin\theta + \theta'^3) - 2\eta\theta'^2(\bar{f}_x\cos\theta + \bar{f}_y\sin\theta) + \eta\theta'(\bar{f}_y'\cos\theta - \bar{f}_x'\sin\theta) = 0 \tag{13}$$

When the curve $\boldsymbol{\Gamma}(s)$ is determined, all $\theta(s)$ and its derivatives are known. Therein, Eq. 13 is an ordinary differential equation for variable $\kappa_0'(s)$. Once the boundary conditions are determined, we can obtain the theoretical solution of the inverse design problem by solving Eq. 13. The boundary conditions for the Eq. 13:

$$\begin{aligned} &\text{Free: } \kappa_0'(s=S) = \theta''(s=S), \\ &\text{Free: } \kappa_0''(s=S) = \theta'''(s=S) + \eta(\bar{f}_x\sin\theta(s=S) - \bar{f}_y\sin(\theta(s=S))). \end{aligned} \tag{14}$$

However, we can find that the solution of Eq. 13 is $\kappa'(s)$. Therein, we need to do the integration to obtain $\kappa(s)$. To calculate the natural curvature of the planar rod, we need to give the initial boundary condition for $\kappa(s)$:

$$\text{Free: } \kappa_0(s=S) = \theta'(s=S). \tag{15}$$

Combining Eqs. 13, 14 and 15, we can solve the elastica of the inverse problem.

4 | INVERSE DESIGN FROM NOISY DATA

In Sec. 3.2, we present the elastica for the inverse design of a planar rod. However, our analysis above does not account for the influence of uncertainties in this engineering problem. Given the theoretical framework is based on the expression of $\theta(s)$, which is usually from the measured target shape $\boldsymbol{\Gamma}_m$. Therein, the uncertainties in this problem primarily come from two aspects: the uncertainties from the modeling and the uncertainties that exist in the measurements. To address the gap brought by the

Author Manuscript

uncertainties, we first investigate the impact of uncertainties on the formulated theoretical framework. Then, we explore strategies to mitigate the adverse effects of uncertainties on the inverse design process.

4.1 | Uncertatinties in the modeling

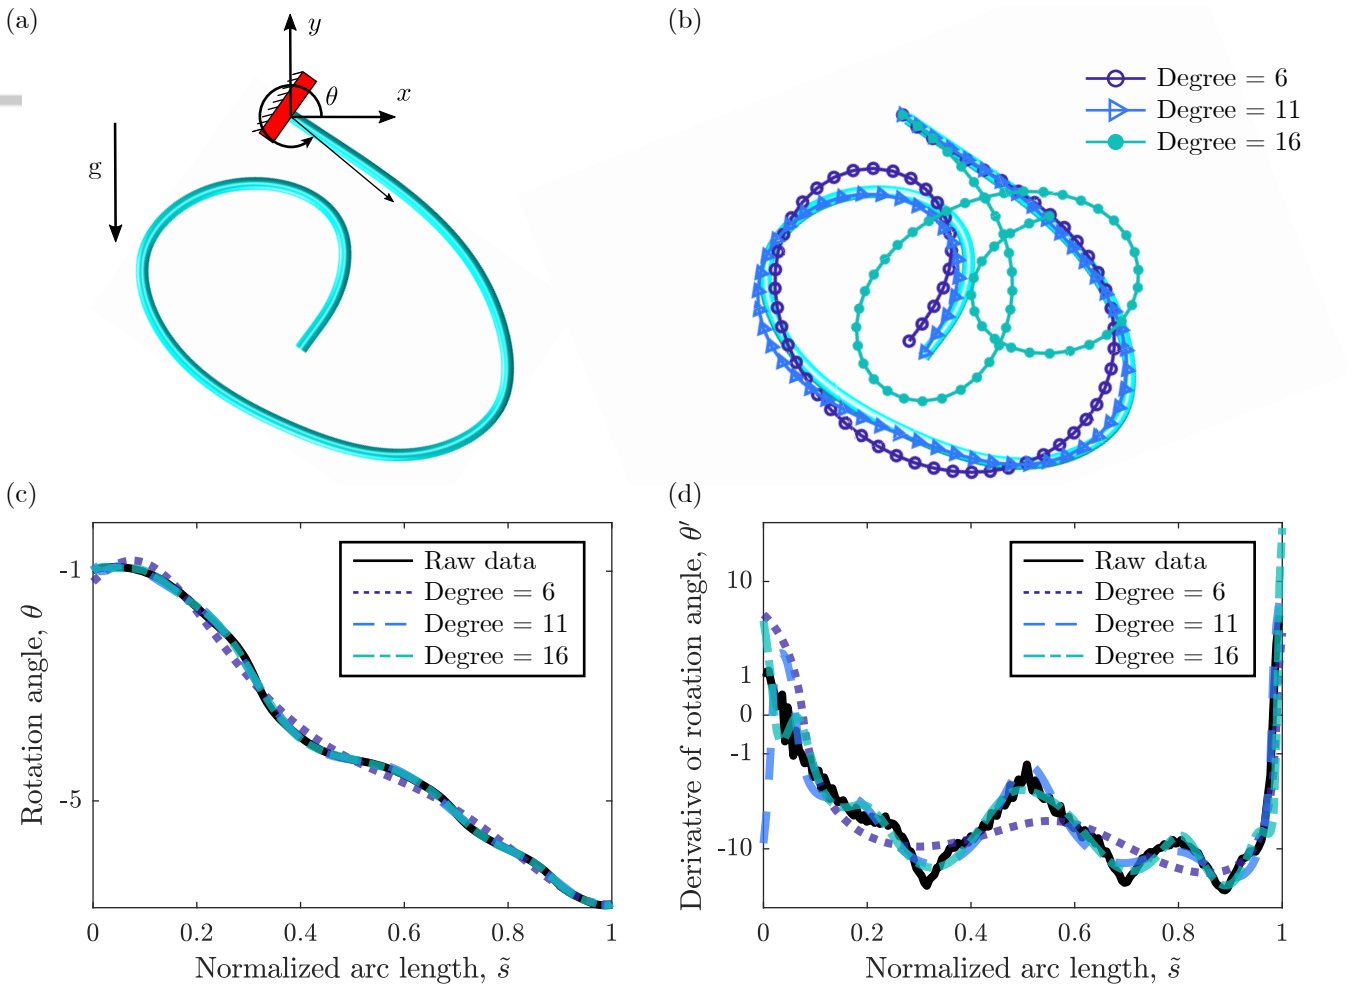


FIGURE 4 Influence of the chosen surrogate model for expression $\theta(s)$. (a) The designed target shape – letter "A" under gravity. (b) The comparison of the deformed shapes computed from the natural shape solved by different fitted models. (c) The comparison between raw data and fitted data from the polynomial regression model with degrees 6, 11, and 16 for $\theta(s)$. (d) The comparison between raw data and fitted data for $\theta'(s)$. Note that the normalized arc length $\tilde{s} = s/S$.

When computing the theoretical solution derived from Eq. 13, the analysis is established on $\theta(s)$ obtaining by the combination of $\mathbf{\Gamma}(s)$ and Eq. 1. Given the solution's accuracy is closely tied to the high-order derivatives of $\theta(s)$, which are highly sensitive to the selection of the surrogate model used to describe $\theta(s)$, both overfitting and underfitting of the surrogate model can lead to significant deviations in the solution.

In Fig. 4, we illustrate the influence of the chosen model on the theoretical solutions with an example. Here, we aim to design the natural shape of a rod so that it forms the letter "A" under gravity, as shown in Fig. 4(a). The letter "A" is extracted from a handwritten note using a digital camera, so that the sensor measurement noise exists in the image. For simplicity, we use a polynomial regression model to represent $\theta(s)$ calculated from the pattern of "A". When the polynomial degree of the fitting model is low (e.g., 6), the model is underfitted, leading to a noticeable difference between the fitted model and the raw data of

Author Manuscript

$\theta(s)$, as shown in Fig. 4 (c). Increasing the polynomial degree (e.g., 16) eliminates such difference but can result in overfitting. As shown in Fig. 4(d), excessively high fitting degrees cause significant deviations in $\theta'(s)$. We compare the accuracy of theoretical solutions from different fitted models of $\theta(s)$ as shown in Fig. 4(b). The stated theoretical framework does not have mechanisms for such a model's uncertainties. Thus, when parameterizing $\theta(s)$, managing the uncertainties associated with the model selection is crucial.

4.2 | Influence of the noisy data

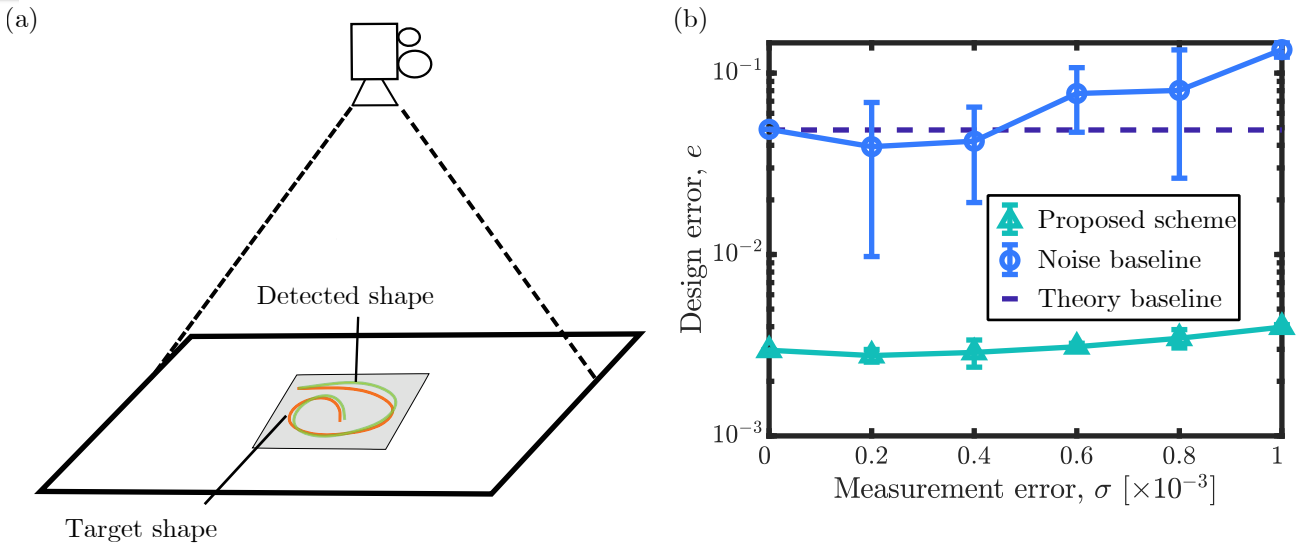


FIGURE 5 Influence of measurement noise on inverse design solutions. (a) Schematic of measuring the target shape, the letter "A," using a sensor (e.g., camera). (b) Impact of measurement error σ on the accuracy of different approaches. The theory baseline represents the result obtained from the theoretical framework without added noise; the noise baseline represents the result obtained from the theoretical framework with added noise; the proposed scheme is our proposed optimal method (the learning framework detailed in Sec. 4.3) designed to be robust against uncertainties.

In real-world engineering applications, sensors such as cameras are commonly employed to measure a rod's deformed configuration $\mathbf{\Gamma}(s)$. However, it is crucial to acknowledge that sensor usage makes uncertainty and noise inevitable. In addition to modeling uncertainties, measurement noise becomes a significant source of uncertainty in this problem. Therein, the measured curve dataset $\mathbf{\Gamma}_m = \{(x_m^{(i)}, y_m^{(i)})\}_{i=1}^N$ for the inverse design problem can be:

$$\begin{aligned} x_m^{(i)} &= x^{(i)} + \epsilon_x^{(i)}, \\ y_m^{(i)} &= y^{(i)} + \epsilon_y^{(i)}, \end{aligned} \tag{16}$$

where $\epsilon_x^{(i)}$ and $\epsilon_y^{(i)}$ are independent Gaussian noises with zero mean. We also presume that the fidelity of the sensor is predetermined, i.e., the standard deviations of $\epsilon_x^{(i)}$ and $\epsilon_y^{(i)}$ are known to be $\sigma_x^{(i)}$ and $\sigma_y^{(i)}$. In Fig. 5, we show the influence of Gaussian noise on the accuracy of the theoretical solutions obtained from Eq. 13. Since Eq. 13 is heavily dependent on the precision of high-order derivatives of $\theta(s)$, which are particularly sensitive to noise in measured data $\mathbf{\Gamma}_m$, the uncertainty existing in this system significantly diminishes the accuracy of the theoretical solutions. Additionally, the Gaussian-distributed noise introduces inconsistencies in the parameterization of $\theta(s)$ across different measurement sequences, leading to substantial deviations in the theoretical solutions for the same target shape. Moreover, the uncertainties introduced from inherent polynomial parameterization of $\theta(s)$ prevent the error of the theoretical baseline from approaching zero. A robust scheme for the inverse design problem is imperative to compensate for the detrimental effects of the above-stated uncertainties.

Author Manuscript

Author Manuscript

4.3 | Learning framework – the optimal inverse design solution

In the theoretical framework, we need to model $\theta(s)$ and evaluate its high-order derivatives to obtain the designed parameters $\kappa_0(s)$. However, due to diffusion of measurement noise affecting the higher order derivatives of $\theta(s)$ and the uncertainty in model selection, directly employing this framework may lead to considerable deviations in determining the design parameter $\kappa_0(s)$. To address this challenge, we propose a novel forward framework aimed at directly evaluating the measured target shape $\mathbf{\Gamma}_m$ with improved robustness against the uncertainties. This approach enables us to avoid directly modeling $\theta(s)$ and mitigate the impact of measurement errors, thus enhancing the accuracy of solving for the design parameter $\kappa_0(s)$ within the framework.

The proposed forward framework is inspired by the physically informed neural networks (PINN)[37], which has proven its efficacy in solving inverse design problems in many different physical scenarios. Here, we treat the design parameter, natural curvature κ_0 as an unknown, then the ODE in Eq. 8 becomes:

$$\mathcal{R}(\mathbf{q}, \kappa_0) = \frac{\mathrm{d}\mathbf{q}}{\mathrm{d}s} - f(\mathbf{q}, \kappa_0) = 0, \tag{17}$$

where $\mathbf{q} = \mathbf{q}(s)$ is the forward solution of the deformed rod. Here, we start by representing κ_0 with a surrogate model $\kappa_0(s, \boldsymbol{\phi})$, where $\boldsymbol{\phi}$ is the vector of parameters in the surrogate model. Then, we can rewrite Eq. 8 as:

$$\mathcal{R}(\mathbf{q}, \kappa_0(s, \boldsymbol{\phi})) = 0. \tag{18}$$

By solving Eq. 18 with an explicit Runge-Kutta method[41], we can obtain the expression of $x(s, \boldsymbol{\phi})$ and $y(s, \boldsymbol{\phi})$ directly. Then, the likelihood can be calculated as:

$$\begin{aligned} P(\mathbf{\Gamma}_m|\boldsymbol{\phi}) &= P(\mathbf{\Gamma}_m^x|\boldsymbol{\phi})P(\mathbf{\Gamma}_m^y|\boldsymbol{\phi}), \\ P(\mathbf{\Gamma}_m^x|\boldsymbol{\phi}) &= \prod_{i=1}^{N} \frac{1}{\sqrt{2\pi\sigma_x^{(i)^2}}} \exp\left(-\frac{(x_m^{(i)} - x^{(i)})^2}{2\sigma_x^{(i)^2}}\right), \\ P(\mathbf{\Gamma}_m^y|\boldsymbol{\phi}) &= \prod_{i=1}^{N} \frac{1}{\sqrt{2\pi\sigma_y^{(i)^2}}} \exp\left(-\frac{(y_m^{(i)} - y^{(i)})^2}{2\sigma_y^{(i)^2}}\right). \end{aligned} \tag{19}$$

We take the logarithm on both sides of Eq. 19 to get the loss function:

$$L(\boldsymbol{\phi}) = -\log P(\mathbf{\Gamma}_m|\boldsymbol{\phi}) \sim \frac{1}{N}\sum_{i=1}^{N}((x_m^{(i)} - x^{(i)})^2 + (y_m^{(i)} - y^{(i)})^2), \tag{20}$$

which is just the classical mean squared error (MSE) loss. In our designed training loop, MSE loss should be minimized to obtain the optimal parameters $\boldsymbol{\phi}$ for depicting the surrogate model κ_0.

4.4 | Adjoint method – back differentitation

In Eq. 20, we can find the relationship of the loss function to the parameters $\boldsymbol{\phi}$ of the surrogate model of κ_0 is implicit since $x^{(i)}$ and $y^{(i)}$ are obtained by solving Eq. 8. Therefore, the main technical difficulty in the training loop is exploring the reverse-mode differentiation. Considering the memory cost and computational speed, using numerical schemes like finite element difference to compute the gradient $\nabla_{\boldsymbol{\phi}} L$ is inappropriate here. Inspired by the backward differentiation in Neural ODE[38], we compute the gradients using the adjoint sensitivity method[42]. This approach computes gradients by solving a second, augmented ODE backward in time and is applicable to the training loop. This approach scales linearly with problem size, has low memory cost, and explicitly controls numerical error.

To formulate the adjoint method, we first rewrite the loss to an optimization object:

$$L(\mathbf{q}, \boldsymbol{\phi}) \simeq \int g(\boldsymbol{\phi}, s)\mathrm{d}s = \mathbf{q}_d^T \mathbb{Q} \mathbf{q}_d \mathrm{d}s, \tag{21}$$

with

$$\mathbf{q}_d = \mathbf{q} - [0, 0, 0, 0, x_m, y_m]^T, \tag{22}$$

and

$$\mathbb{Q} = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}, \tag{23}$$

where the loss defined here is equally effective to the loss in Eq. 20. Therein, we can formulate a constrained optimization problem:

$$\begin{aligned} \min_{\phi} \quad & L(\mathbf{q}, \boldsymbol{\phi}) \\ \text{s.t.} \quad & \frac{\mathrm{d}\mathbf{q}}{\mathrm{d}s} = \mathbf{f}(\mathbf{q}, s, \boldsymbol{\phi}). \end{aligned}$$

To solve the constrained optimization, we can formulate a Lagrangian:

$$\mathcal{L} = \int (g(\mathbf{q}, \boldsymbol{\phi}) + \boldsymbol{\lambda}^T (\mathbf{f} - \frac{\mathrm{d}\mathbf{q}}{\mathrm{d}s})) \mathrm{d}s, \text{ with } \boldsymbol{\lambda} \in \mathbb{R}^6 \tag{24}$$

We employ the differentiation on two sides:

$$\frac{\mathrm{d}\mathcal{L}}{\mathrm{d}\boldsymbol{\phi}} = \int (\frac{\partial g}{\partial \boldsymbol{\phi}} + \boldsymbol{\lambda}^T \frac{\partial \boldsymbol{f}}{\partial \boldsymbol{\phi}} + (\frac{\partial g}{\partial \mathbf{q}} + \boldsymbol{\lambda}^T \frac{\partial \mathbf{f}}{\partial \mathbf{q}} + \frac{\mathrm{d}\boldsymbol{\lambda}}{\mathrm{d}s}) \frac{\mathrm{d}\mathbf{q}}{\mathrm{d}\boldsymbol{\phi}}) \mathrm{d}s + \boldsymbol{\lambda}(0)^T \frac{\mathrm{d}\mathbf{q}(0)}{\mathrm{d}\boldsymbol{\phi}} - \boldsymbol{\lambda}(S)^T \frac{\mathrm{d}\mathbf{q}(S)}{\mathrm{d}\phi}. \tag{25}$$

Here, we choose $\boldsymbol{\lambda}(s)$, which can be solved by:

$$\frac{\mathrm{d}\boldsymbol{\lambda}}{\mathrm{d}s} = -\frac{\partial g}{\partial \mathbf{q}} - \boldsymbol{\lambda}^T \frac{\partial \mathbf{f}}{\partial \mathbf{q}}, \tag{26}$$

with the specified boundary conditions as follows:

$$\begin{aligned} \text{Clamped:} \quad & \boldsymbol{\lambda}_i(s = 0) = 0 \quad \text{for } i = 2, 3, 4, \\ \text{Free:} \quad & \boldsymbol{\lambda}_i(s = S) = 0 \quad \text{for } i = 1, 5, 6. \end{aligned} \tag{27}$$

Then, plugging the solution of $\boldsymbol{\lambda}(s)$ to Eq. 25, the gradient of loss can be obtained:

$$\boldsymbol{\nabla}_{\phi} L = \frac{\mathrm{d}\mathcal{L}}{\mathrm{d}\boldsymbol{\phi}} = \int (\frac{\partial g}{\partial \boldsymbol{\phi}} + \boldsymbol{\lambda}^T \frac{\partial f}{\partial \boldsymbol{\phi}}) \mathrm{d}s = \int \boldsymbol{\lambda}^T \frac{\partial f}{\partial \boldsymbol{\phi}} \mathrm{d}s \tag{28}$$

With the help of the computed gradient $\boldsymbol{\nabla}_{\phi} L$, we utilize Adam optimizer – one of the most classical machine learning optimizers – to train the surrogate model. The full algorithm is shown in Algo. 1.

5 | NUMERICAL VALIDATION

In this section, we present comprehensive quantitative results to evaluate the performance of our proposed learning framework for the inverse design of planar rods. First, we compare the performance of the theoretical framework and the learning framework in processing artificially generated noisy curves. Subsequently, we explore an engineering application of the inverse design process: can we design planar rods with varying stiffness to form a target pattern designed by users? We use a camera to detect and extract the pattern drawn on paper, which is then used as input for our proposed scheme. Furthermore, we validate the effectiveness of the method in solving the inverse design problem for a magneto-elastic rod. Those results further demonstrate the efficacy of our method.

5.1 | Comparison between the theoretical and learning frameworks

Here, we generated multiple artificial target curves to evaluate the performance of the theoretical and learning frameworks. Generally, the target pattern $\boldsymbol{\Gamma}$, which is the deformed configuration of a planar rod under the gravity, should be smooth due to the rod's elasticity. Since we aim to mimic a real engineering scenario, measurement noise should be introduced to these smooth curves. The protocol for preparing the noisy measured dataset of target shapes is as follows. First, we define the rotation angle

Author Manuscript

Algorithm 1 Inverse Design Process

Input: $\mathbf{\Gamma}_m, \eta, S, f_x, f_y$
Output: κ_0

$\alpha \leftarrow$ learning rate of Adam optimizer
$\beta_1, \beta_2 \leftarrow$ moment estimate decay rate
$\epsilon \leftarrow$ a small constant
$\theta^{(0)} \leftarrow$ initialized with Eq. 1
$\kappa_0^{(0)} \leftarrow$ initialized with Eqs. 13, 14, and 15
$\boldsymbol{\phi}^{(0)} \leftarrow$ initialized by regressing $\kappa_0^{(0)}$
$L \leftarrow$ initialize with a large constant
$i \leftarrow 0$
while $i <$ max_iter **do**
  $\kappa_0(s) \leftarrow$ computed with the surrogate model $\kappa_0(s; \boldsymbol{\phi})$
  $\mathbf{q}(s) \leftarrow$ solved by Eqs. 8, 9, and 10
  $L \leftarrow$ loss computed by Eq. 21
  if $L <$ small threshold **then**
    break
  end if
  $\boldsymbol{\lambda}(s) \leftarrow$ solved by the augmented ODE (Eq. 26) and corresponding BCs (Eq. 27)
  $\nabla_{\boldsymbol{\phi}} L \leftarrow$ computed with Eq. 28
  $\Delta\boldsymbol{\phi} \leftarrow$ ADAM $(\alpha, \beta_1, \beta_2, \epsilon, \boldsymbol{\phi}, \nabla_{\boldsymbol{\phi}} L)$
  $\boldsymbol{\phi}^{(i+1)} \leftarrow \boldsymbol{\phi}^{(i)} - \Delta\boldsymbol{\phi}$
  $i \leftarrow i + 1$
end while
$\boldsymbol{\phi}^* \leftarrow \boldsymbol{\phi}^{(i)}$
$\kappa_0 \leftarrow$ computed by the surrogate model $\kappa_0(s; \boldsymbol{\phi}^*)$
return κ_0

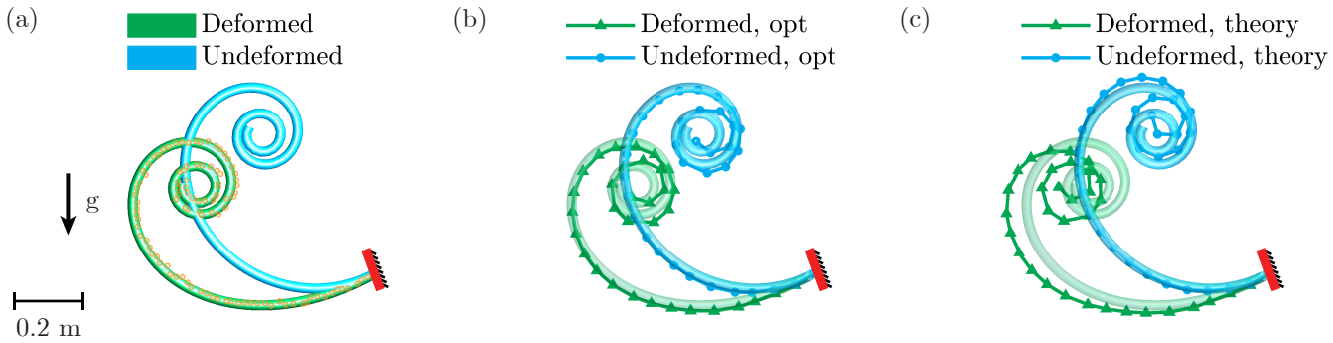


FIGURE 6 A randomly generated curve used to validate the effect of varying noise levels, characterized by the standard deviation $\sigma = 0.002$ (unit: m). The deformed shapes (green) are computed from the natural shape (blue) obtained by the fitted model. (a) Ground truth. (b) Predicted shape through optimal inverse design from noisy data. (c) Predicted shapes through inverse solver from noisy data.

$\theta(s)$ using a polynomial function with coefficients randomly generated within a specific range, e.g., [–10, 10]. We then recover the deformed curve $\mathbf{\Gamma}(s)$ from the randomly generated $\theta(s)$. Next, we sample points from the deformed curve. To each sampling point, we add artificial Gaussian noise with a specific standard deviation σ to mimic measurement noise. The resulting sampled discrete noisy dataset $\mathbf{\Gamma}_m$ is then used as input to compute the natural shape of the designed planar rod, as illustrated in Fig. 6.

Once the measured dataset $\mathbf{\Gamma}_m$ is obtained, we utilize both the theoretical and learning frameworks to solve the inverse design problem. Hereafter, all quantities related to the theoretical framework are denoted with the superscript "theory," and quantities

Author Manuscript

related to our learning framework are denoted with "opt." For the theoretical framework, we need to construct a model to parameterize $\theta^{\text{theory}}(s)$ from $\mathbf{\Gamma}_m$. This parameterized $\theta^{\text{theory}}(s)$ is then used in Eq. 13 to determine the natural curvature κ_0^{theory} of the rod. As for the learning framework, we can compute the natural curvature κ_0^{opt} with Algo. 1. By substituting natural curvature κ_0 into Eq. 8, we can solve the rod's deformed configuration $\mathbf{\Gamma}$, corresponding to the different frameworks. The performance of the different frameworks is evaluated by comparing the average difference

$$e = \underset{s\in[0,S]}{\text{mean}} \frac{\|\mathbf{\Gamma}(s) - \mathbf{\Gamma}_m\|}{S}. \tag{29}$$

A smaller difference e value indicates better performance.

In Fig. 6, we illustrate the impact of noisy measured data on the results of different frameworks. We can find that the theoretical solution is sensitive to noise, as shown in Fig. 6(c), while our proposed learning framework is robust against the noise, accurately determining the natural shape of the planar rod so that it can deform to the prescribed pattern exactly, as shown in Fig. 6(b).

To comprehensively evaluate the performance of the two frameworks, we randomly generate 120 target shapes and assess how each framework handles planar rods with varying stiffness. The differences between the predicted deformed configurations and the noise-measured data are given in Fig. 7. We can find e^{opt} is much smaller compared to the e^{theory}. The difference between e^{opt} and e^{theory} becomes more significant when the standard deviation of the noise is larger, indicating that our learning framework performs better in robustly reconstructing the natural shape of a planar rod from noisy data. We also evaluate the performance of both frameworks for planar rods with different stiffness. The learning framework consistently achieves high performance across various planar rods with different stiffness demonstrating that our proposed learning framework can achieve robust and accurate inverse design results for rods made from various materials, whereas the theoretical framework generally performs poorly in nearly all cases.

The performance of the learning framework for the inverse design is also illustrated with three canonical cases: a circle, a spiral, and a cross composed of sinusoidal curves in Fig. 8.

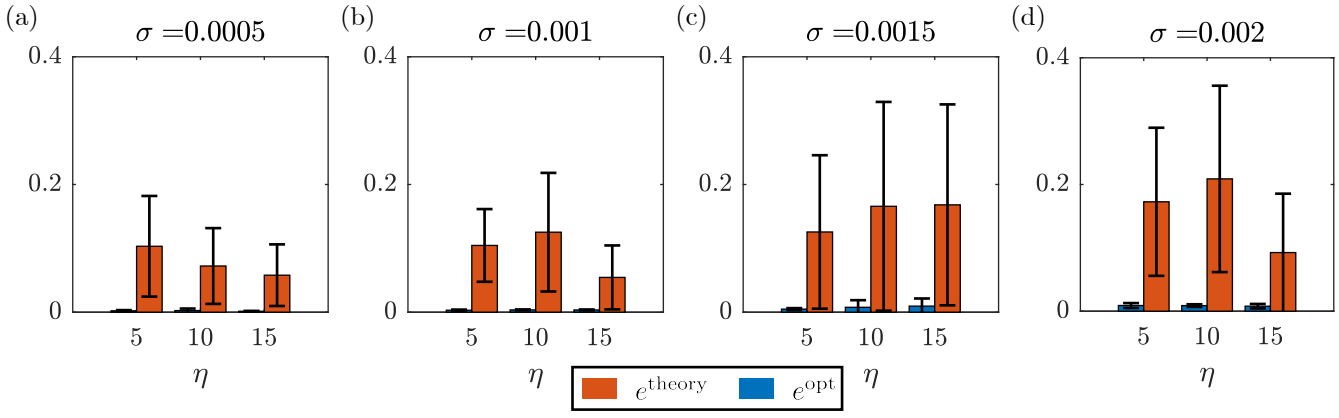


FIGURE 7 Evaluation of the inverse design accuracy for various target patterns with different measurement noise and material properties. e^{theory} denotes the difference between the deformed configuration derived from the natural shape solved with the theoretical framework and the measured target shape, while e^{opt} denotes the difference between the deformed configuration derived from the natural shape solved with the learning framework and the measured target shape. For each combination of the standard deviation of the measurement noise σ (unit: m) and the rod's material properties η, 10 target patterns are randomly generated to evaluate the inverse design framework's accuracy.

5.2 | Case study 1: designing planar rods from sketches

In this subsection, we demonstrate the ability to construct the natural shape of the rod with target shapes derived from human writing. Computer vision has become a powerful tool in various engineering fields, including pattern recognition and rapid measurement[43,44,45]. With recent advancements in detecting deformable linear objects[46], we can now use a camera (Realsense

Author Manuscript

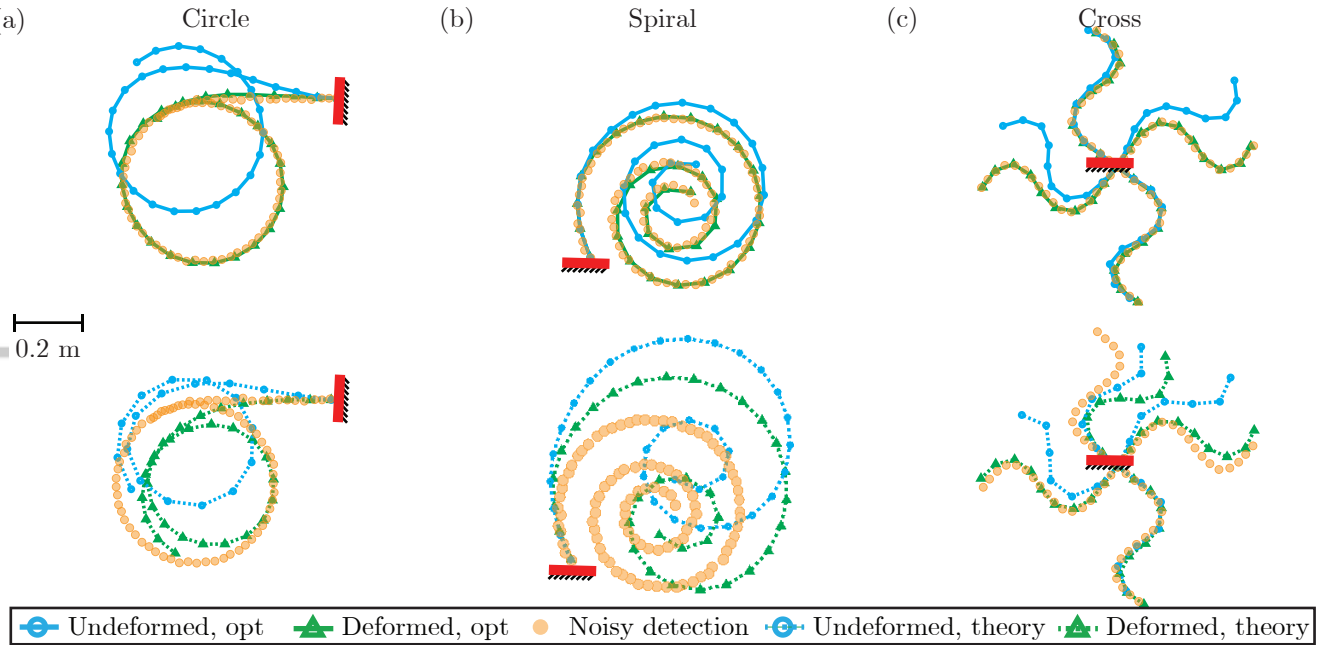


FIGURE 8 Three sample cases demonstrating variations in geometric patterns: (a) circle ($\eta = 15, \sigma = 0.002$), (b) spiral ($\eta = 15, \sigma = 0.002$), and (c) cross composed of intertwined sine curves ($\eta = 5, \sigma = 0.002$).

D435i) to extract patterns from human-drawn sketches in real time, enabling us to easily obtain the desired target shapes. Here, we showcase the pattern acquisition process for the four letters "U", "C", "L", and "A", as shown in Fig. 9(a).

Once the discretized patterns are obtained, we can design the target shape and boundary conditions for the inverse design problem, as shown in Fig. 9(b). Here, we employ our proposed learning framework to execute inverse design for planar rods with different stiffness. First, we need to select a surrogate model to express $\kappa_0(s)$. This surrogate model can be any parameterized model, e.g., polynomial regression model, neural network, etc. Here, we use a polynomial regression model. This model has a single controlling parameter: the fitting degree number n. We select a relatively high degree number $n = 14$ to model $\kappa_0(s)$ to prevent the underfitting issue. As shown in Fig. 9, our proposed learning framework can generalize to different handwriting patterns and material properties. The solutions generated by our method closely match the target shapes with minimal discrepancy, demonstrating its robustness against measurement noise and its effective regularization on the surrogate model.

5.3 | Case Study 2: designing planar rods under arbitrary loading

In this subsection, we demonstrate the capability to compute the natural shape of soft structures (specifically planar rods) such that they deform into a desired target shape under arbitrary external loading.

Here, we generate a target shape, shown in green in Fig. 10, and analyze its natural shape under different external loading conditions. We examine three cases: (1) gravity-induced deformation, where the rod deforms under its own weight, (2) deformation under a linearly distributed load, where the external loading varies linearly along s, and (3) deformation under a sinusoidally distributed load, where the external force follows a sinusoidal function.

In particular, while the final shape remains the same, the natural shape of the rod varies depending on the external loading conditions. As shown in Fig. 10, our proposed method can accurately determine these natural shapes, highlighting its effectiveness in the design of soft structures subjected to varying external loads. The solutions generated by our method closely match the target shapes with minimal discrepancy. This highlights its potential for inverse design applications that require precise shape programming under arbitrary external forces, such as soft actuators responding to prescribed actuation inputs.

Author Manuscript

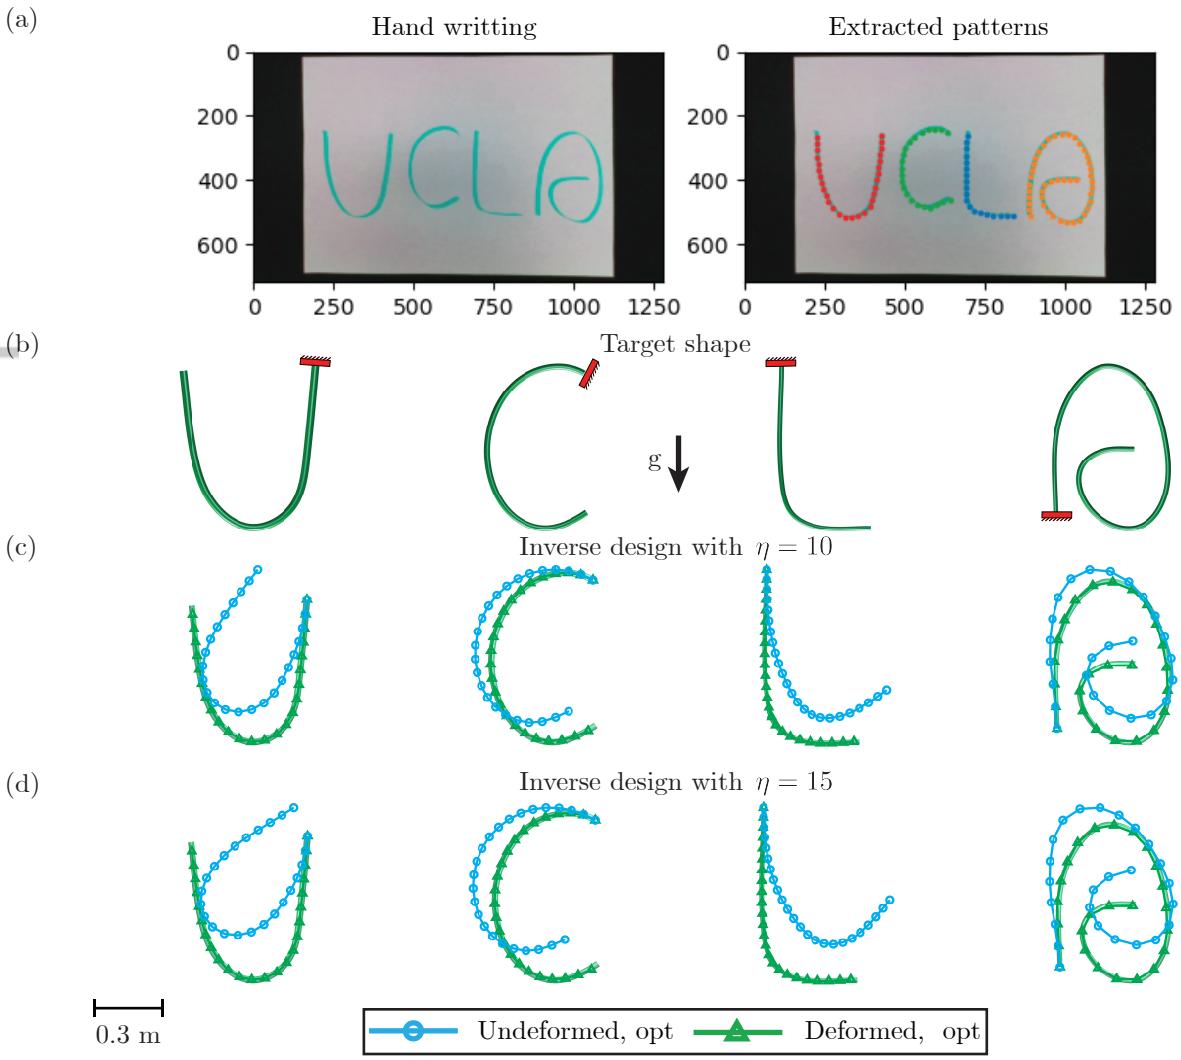


FIGURE 9 Inverse design from sketches. (a) Handwritten letters (left) and their corresponding discretized patterns (right), captured using an Intel RealSense D435i camera at a resolution of 1280×720. (b) The target deformed shapes of the handwritten letters "U," "C," "L," and "A" under gravity. (c) Inversely designed undeformed rod configurations with $\eta = 10$. (d) Inversely designed undeformed rod configurations with $\eta = 15$.

5.4 | Case study 3: inverse design of planar magneto-elastic rods

One significant advantage of the proposed approach is its generality in solving inverse design problems for various soft structures, provided that a forward solver for the structure is available. In other words, there is no need to derive an explicit theoretical solution for the inverse problem, since our method can be directly applied as long as the forward solver is known. To illustrate this versatility, we present a case study on the inverse design of magneto-elastic rods, which have significant practical applications in the medical field[47,48].

First, we establish the forward solver by deriving the equilibrium equation for a magneto-elastic rod. We assume that the rod's magnetization is always aligned with its tangent direction, with a magnetization intensity denoted by $\mathcal{M}$. Here, we assume that the magnetization is along the rod tangential direction. The external magnetic field is considered uniform and is represented by the vector $\mathbf{B}$. Therein, the governing equation is as follows:

Author Manuscript

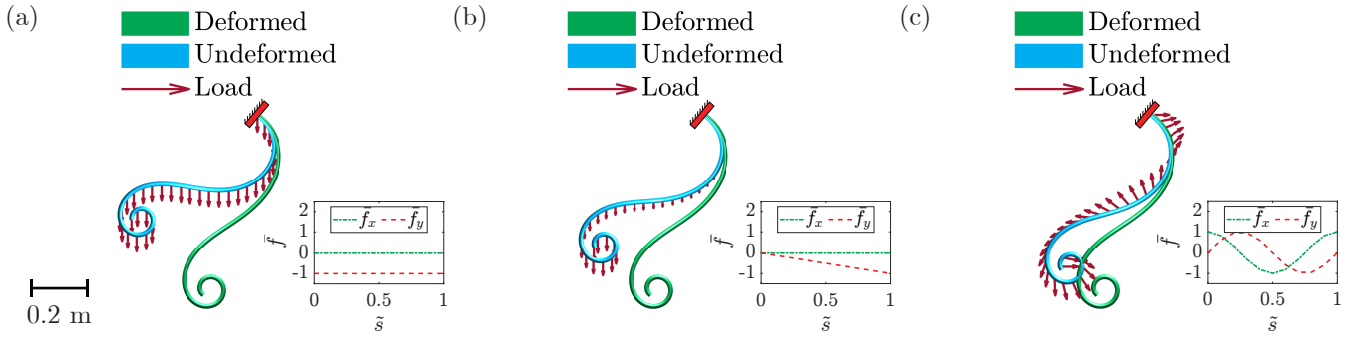


FIGURE 10 Inverse design of a planar rod under various external loading. (a) Inversely designed undeformed rod configurations with $\eta = 15$ and $\sigma = 0.001$ under loading condition $\bar{f}_x(\tilde{s}) = 0$ and $\bar{f}_y(\tilde{s}) = -1$. (b) Inversely designed undeformed rod configurations with $\eta = 15$ and $\sigma = 0.001$ under loading condition $\bar{f}_x(\tilde{s}) = 0$ and $\bar{f}_y(\tilde{s}) = -\tilde{s}$. (c) Inversely designed undeformed rod configurations with $\eta = 15$ and $\sigma = 0.001$ under loading condition $\bar{f}_x(\tilde{s}) = \cos(2\pi\tilde{s})$ and $\bar{f}_y(\tilde{s}) = \sin(2\pi\tilde{s})$.

$$
\begin{aligned}
\mathbf{q} &= [\theta, \bar{M}, \bar{V}, \bar{T}, x, y]^T \\
\mathcal{R}(\mathbf{q}) &= \frac{\mathrm{d}\mathbf{q}}{\mathrm{d}s} - f(\mathbf{q}) = 0 \\
f(\mathbf{q}, \kappa_0) &= \begin{bmatrix} \eta q_2 + \kappa_0 - (\bar{B}_y \cos q_1 - \bar{B}_x \sin q_1) \\ q_3 \\ q_4[\eta q_2 + \kappa_0 - (\bar{B}_y \cos q_1 - \bar{B}_x \sin q_1)] \\ -q_3[\eta q_2 + \kappa_0 - (\bar{B}_y \cos q_1 - \bar{B}_x \sin q_1)] \\ \cos q_1 \\ \sin q_1 \end{bmatrix},
\end{aligned} \tag{30}
$$

where $\bar{\mathbf{B}} = [\bar{B}_x, \bar{B}_y]$ is the variable standing for the influence of external magnetic field vector, defined as $\bar{\mathbf{B}} = \frac{\mathbf{B}\|\mathcal{M}\|}{EI}$.

The boundary conditions of the inverse problem studied here remain consistent with Eqs. 9 and 10. Therein, we can apply Algo. 1 to derive the natural shape of the magento-elastic rod by replacing the forward solver stated in Eq. 8 to Eq. 30. To validate the effectiveness of our approach, we design the natural shape of a magneto-elastic rod for three different target shapes. As shown in Fig. 11, the results are highly consistent with expectations, further reinforcing our claim that the proposed method is broadly applicable to inverse design problems for a general class of soft structures.

.

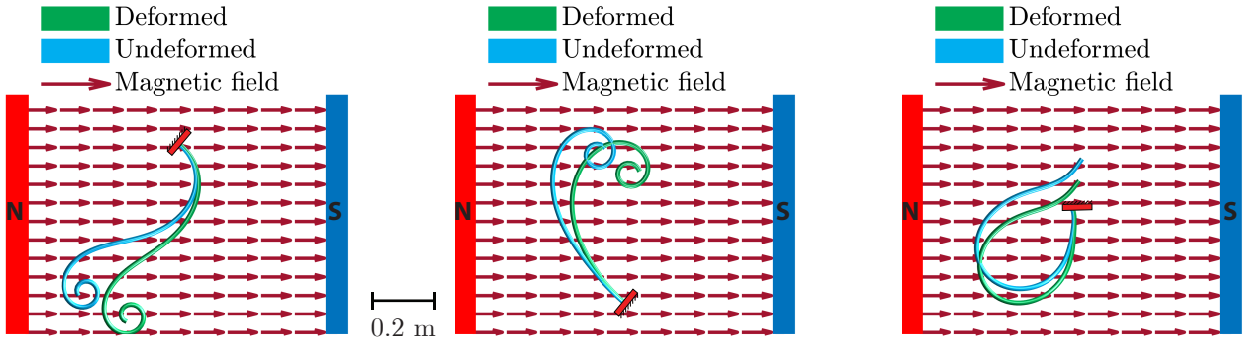


FIGURE 11 Inverse design of magneto-elastic rods. The computed undeformed rod configurations with $\eta = 10$, $\bar{B} = [1, 0]$, $\sigma = 0.001$ with three different rod configurations are presented.

Author Manuscript

Author Manuscript

6 | CONCLUSIONS

In this article, we combine the elastic theory and machine learning algorithms to propose an efficient and robust learning framework for the inverse design of elastic rods from noisy measurement data. Inspired by physically informed neural networks, we design a forward structure based on the elastic theory of rods. We then define a loss function to represent the inverse design objective, enabling us to use reverse differentiation to optimize the relevant parameters – the natural shape of the rod. With comprehensive numerical validations, our proposed learning framework is proven to be valid in exploring the natural shape of the rod to minimize the designed loss function so that excellent agreements can be found between the target patterns and designed deformed rods. The learning framework provides an effective scheme to solve inverse design problems of soft structures with imperfect measurements. The framework can provide valuable insights into real-world manufacturing of flexible structures such as soft robot design.

Future research could explore several promising directions to extend the presented approach. One avenue involves generalizing the framework to other types of structures. The proposed method is designed to explore inverse design solutions for any structure with a well-defined forward equation. Testing and validating the framework on more complex systems represents a natural progression of this work. Furthermore, beyond external loading and natural shape, other factors also play critical roles in determining structural deformation. For instance, external magnetic fields significantly influence the deformation of magneto-elastic structures. Addressing the inverse design of such fields to achieve desired structural configurations introduces a compelling new challenge that deserves further investigation. Another potential extension is the incorporation of more sophisticated material models, such as those accounting for anisotropy or viscoelasticity, to enhance the framework's versatility in real-world applications. By pursuing these directions, the proposed approach can significantly expand its scope and impact, contributing to broader advancements in structural design and optimization.

AUTHOR CONTRIBUTIONS

D.T., Z.H., J.L., and W.H. designed the research; D.T. conducted the mathematical analysis; D.T., Z.H., J.L., and W.H. conducted the numerical simulations and experiments; D.T., Z.H., J.L., and W.H. wrote the paper.

ACKNOWLEDGMENTS

W.H. acknowledges the financial support from the startup funding from Newcastle University.

CONFLICT OF INTEREST

The authors declare no potential conflict of interest.

References

1. Kaufman DM, Tamstorf R, Smith B, Aubry JM, Grinspun E. Adaptive nonlinearity for collisions in complex rod assemblies. *ACM Transactions on Graphics (TOG).* 2014;33(4):1–12.
2. Gerbode SJ, Puzey JR, McCormick AG, Mahadevan L. How the cucumber tendril coils and overwinds. *Science.* 2012;337(6098):1087–1091.
3. Tong D, Choi A, Qin L, Huang W, Joo J, Jawed MK. Sim2real neural controllers for physics-based robotic deployment of deformable linear objects. *The International Journal of Robotics Research.* 2024;43(6):791–810.
4. Hogan M, Dattagupta N, Crothers D. Transient electric dichroism of rod-like DNA molecules.. *Proceedings of the National Academy of Sciences.* 1978;75(1):195–199.
5. Geblinger N, Ismach A, Joselevich E. Self-organized nanotube serpentines. *Nature nanotechnology.* 2008;3(4):195–200.
6. Choi A, Tong D, Jawed MK, Joo J. Implicit Contact Model for Discrete Elastic Rods in Knot Tying. *Journal of Applied Mechanics.* 2021;88(5).
7. Tong D, Choi A, Joo J, Borum A, Khalid Jawed M. Snap buckling in overhand knots. *Journal of Applied Mechanics.* 2023;90(4):041008.
8. Tong D, Ibrahim Khalil M, Justin Silva M, Wang G, Khoda B, Khalid Jawed M. Mechanical Response of Fisherman's Knots During Tightening. *Journal of Applied Mechanics.* 2023;91(3):031008. doi: 10.1115/1.4063895
9. Tong D, Choi A, Joo J, Jawed MK. A fully implicit method for robust frictional contact handling in elastic rods. *Extreme Mechanics Letters.* 2023;58:101924.
10. Hao Z, Zalavadia S, Jawed MK. Bundling and Tumbling in Bacterial-Inspired Bi-Flagellated Soft Robots for Attitude Adjustment. In: IEEE. 2024:340–346.

Author Manuscript

11. Pai DK. Strands: Interactive simulation of thin solids using cosserat models. In: . 21. Wiley Online Library. 2002:347–352.

12. Chentanez N, Alterovitz R, Ritchie D, et al. Interactive simulation of surgical needle insertion and steering. In: , , , 2009:1–10.

13. Felton S, Tolley M, Demaine E, Rus D, Wood R. A method for building self-folding machines. *Science.* 2014;345(6197):644–646.

14. Sinatra NR, Teeple CB, Vogt DM, Parker KK, Gruber DF, Wood RJ. Ultragentle manipulation of delicate structures using a soft robotic gripper. *Science Robotics.* 2019;4(33):eaax5425.

15. Hyun WJ, Park OO, Chin BD. Foldable graphene electronic circuits based on paper substrates. *Advanced Materials.* 2013;25(34):4729–4734.

16. Chen X, Zheng C, Xu W, Zhou K. An asymptotic numerical method for inverse elastic shape design. *ACM Transactions on Graphics (TOG).* 2014;33(4):1–11.

17. Kirchhoff G. Uber das Gleichgewicht und die Bewegung eines unendlich dunnen elastischen Stabes. *J. Reine Angew. Math..* 1859;56:285–313.

18. Cosserat EMP, Cosserat F. *Théorie des corps déformables*. A. Hermann et fils, 1909.

19. Neukirch S. Extracting DNA twist rigidity from experimental supercoiling data. *Physical review letters.* 2004;93(19):198107.

20. Bouchiat C, Mezard M. Elastic rod model of a supercoiled DNA molecule. *The European Physical Journal E.* 2000;2:377–402.

21. Goriely A, Neukirch S. Mechanics of climbing and attachment in twining plants. *Physical review letters.* 2006;97(18):184302.

22. Tong D, Borum A, Jawed MK. Automated stability testing of elastic rods with helical centerlines using a robotic system. *IEEE Robotics and Automation Letters.* 2021;7(2):1126–1133.

23. Choi A, Tong D, Terzopoulos D, Joo J, Jawed MK. Learning Neural Force Manifolds for Sim2Real Robotic Symmetrical Paper Folding. *IEEE Transactions on Automation Science and Engineering.* 2024.

24. Bertails-Descoubes F, Derouet-Jourdan A, Romero V, Lazarus A. Inverse design of an isotropic suspended Kirchhoff rod: theoretical and numerical results on the uniqueness of the natural shape. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences.* 2018;474(2212):20170837.

25. Qin L, Zhu J, Huang W. A bottom-up optimization method for inverse design of two-dimensional clamped-free elastic rods. *International Journal for Numerical Methods in Engineering.* 2022;123(11):2556–2572.

26. Derouet-Jourdan A, Bertails-Descoubes F, Daviet G, Thollot J. Inverse dynamic hair modeling with frictional contact. *ACM Transactions on Graphics (TOG).* 2013;32(6):1–10.

27. Beck JV, Woodbury KA. Inverse problems and parameter estimation: integration of measurements and analysis. *Measurement Science and Technology.* 1998;9(6):839.

28. Fachinotti VD, Cardona A, Jetteur P. Finite element modelling of inverse design problems in large deformations anisotropic hyperelasticity. *International Journal for Numerical Methods in Engineering.* 2008;74(6):894–910.

29. Li J, Sun X, He Z, Hou Y, Wu H, Zhu Y. Biomimetic Turing machine: A multiscale theoretical framework for the inverse design of target space curves. *Journal of the Mechanics and Physics of Solids.* 2025;196:105999.

30. Turco E. Tools for the numerical solution of inverse problems in structural mechanics: review and research perspectives. *European Journal of Environmental and Civil Engineering.* 2017;21(5):509–554.

31. Capers JR. Inverse design of thin-plate elastic wave devices. *Physical Review Applied.* 2023;20(3):034064.

32. Liu M, Domino L, Vella D. Tapered elasticæ as a route for axisymmetric morphing structures. *Soft Matter.* 2020;16(33):7739–7750.

33. He X, Dong HW, Ren Z, et al. Inverse-designed single-phase elastic metasurfaces for underwater acoustic vortex beams. *Journal of the Mechanics and Physics of Solids.* 2023;174:105247.

34. Nanthakumar S, Zhuang X, Park HS, Nguyen C, Chen Y, Rabczuk T. Inverse design of quantum spin hall-based phononic topological insulators. *Journal of the Mechanics and Physics of Solids.* 2019;125:550–571.

35. Molesky S, Lin Z, Piggott AY, Jin W, Vucković J, Rodriguez AW. Inverse design in nanophotonics. *Nature Photonics.* 2018;12(11):659–670.

36. Bluhm GL, Sigmund O, Poulios K. Inverse design of mechanical springs with tailored nonlinear elastic response utilizing internal contact. *International Journal of Non-Linear Mechanics.* 2023;157:104552.

37. Cuomo S, Di Cola VS, Giampaolo F, Rozza G, Raissi M, Piccialli F. Scientific machine learning through physics–informed neural networks: Where we are and what's next. *Journal of Scientific Computing.* 2022;92(3):88.

38. Chen RT, Rubanova Y, Bettencourt J, Duvenaud DK. Neural ordinary differential equations. *Advances in neural information processing systems.* 2018;31.

39. Yang L, Meng X, Karniadakis GE. B-PINNs: Bayesian physics-informed neural networks for forward and inverse PDE problems with noisy data. *Journal of Computational Physics.* 2021;425:109913.

40. Lu L, Pestourie R, Yao W, Wang Z, Verdugo F, Johnson SG. Physics-informed neural networks with hard constraints for inverse design. *SIAM Journal on Scientific Computing.* 2021;43(6):B1105–B1132.

41. Kierzenka J, Shampine LF. A BVP solver based on residual control and the Maltab PSE. *ACM Transactions on Mathematical Software (TOMS).* 2001;27(3):299–316.

42. Pontryagin LS. *Mathematical theory of optimal processes*. Routledge, 2018.

43. Zhu J, Yuksek NS, Almasri M, Feng Z. Numerical modeling of dynamic response of miniature multi-impact electromagnetic device for low and wide range frequencies energy harvesting. *Proceedings of the Institution of Mechanical engineers, Part C: Journal of Mechanical Engineering Science.* 2019;233(7):2400–2409.

44. Zhu J, Qin L, Li Y. Bilateral multi-impact oscillators for cantilever energy harvesting enhancement. *International Journal of Green Energy.* 2022;19(5):521–528.

45. Yu J, Sun H, Xia Z, Zhu J, Zhang Z. Sample balancing of curves for lens distortion modeling and decoupled camera calibration. *Optics Communications.* 2023;537:129221.

46. Choi A, Tong D, Park B, Terzopoulos D, Joo J, Jawed MK. mbest: Realtime deformable linear object detection through minimal bending energy skeleton pixel traversals. *IEEE Robotics and Automation Letters.* 2023.

47. Huang W, Liu M, Hsia KJ. A discrete model for the geometrically nonlinear mechanics of hard-magnetic slender structures. *Extreme Mechanics Letters.* 2023;59:101977.

48. Huang W, Liu M, Hsia KJ. Modeling of magnetic cilia carpet robots using discrete differential geometry formulation. *Extreme Mechanics Letters.* 2023;59:101967.

Author Manuscript